

AVANTAJE

- Estetica.
- Consum redus.
- Silentios.
- Control autonom a debitului de evacuare.
- Functie BOOST.

GAMA

- Energy[®] Silence Evo :
 - Marime 100 : debit maxim 70 m³/h.
 - Debit variabil controlat prin sonda de umiditate : mod boost.
 - Timer reglabil pentru o functionare temporizata.

APLICATIE / UTILIZARE


- Evacuare de aer, montaj in perete, plafon sau geam.
- Evacuare de aer permanenta in baile, bucatariile, spatile tehnice.

• Optimizarea evacuarii de aer gratie sondei de umiditate si a timerului.

CONSTRUCTIE / COMPOZITIE

- Din plastic ABS.
- Dubla izolatie.
- Alb, RAL 9010.
- Motor EC : 7 viteze.
- Protectie IPX4.

CURBA DE SELECTIE

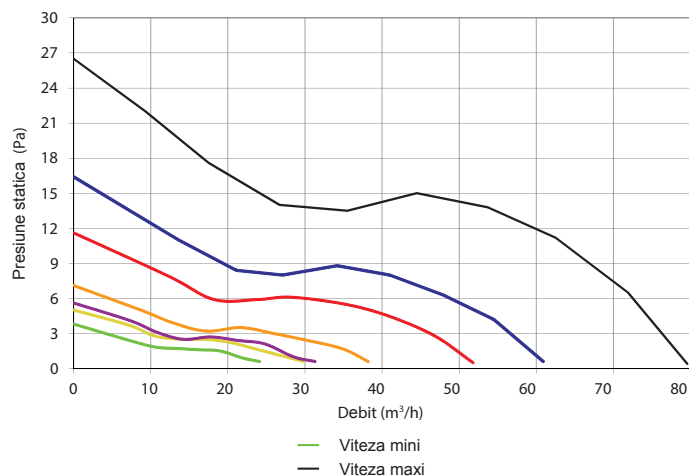

ENERGY[®] SILENCE EVO

Ventilator cu debit variabil, consum redus

INSTALATIE

Interior

MONTAJ

Perete
Plafon

MATERIAL


ABS

CONTROL

Sonda de umiditate
Timer

DESCRIERE TEHNICA

• Dimensiuni, gol montaj, greutate

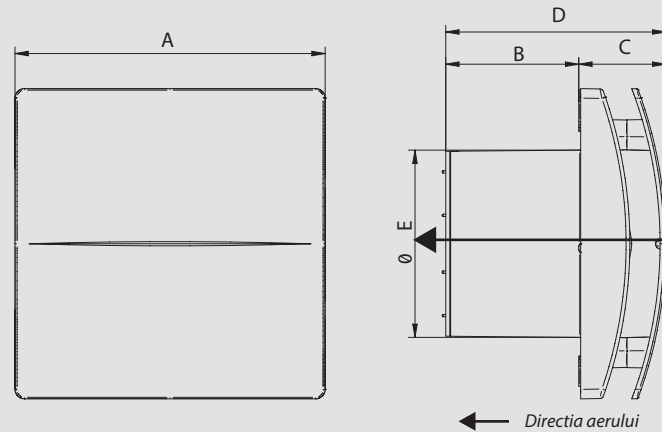

A (mm)	B (mm)	C (mm)	D (mm)	Ø E (mm)	Greutate (Kg)
164	70	46	116	99	0,6

• Caractéristiques

7 viteze pre-stabilite	Debit max. (m ³ /h)	Presiunea statica maxi (Pa)	Consum maxi (W)	Pres. acustica* dB(A)	T° ambianta maxi (°C)
Viteza mica	21	6	1,0	11	50
Viteza mare	83	27	2,5	26	50

Alimentare in 220 - 240 V ~ 50 - 60 Hz

* Presiunea acustica la 3m in campul liber.

ACCESORII

- Tubulatura din PVC de trecere prin perete :
 - Marime 100 : Tubulatura de trecere : Ø 100, L 375 mm.
- Grila exterioara alba :
 - Marime100.